

Installation instructions for

**TORQUE DISC**

KTM EXC, XC, 250 - 300, 2014 → / HUSQVARNA TE, TX, 250 - 300, 2016 →  
GASGAS EC, EX, 250 - 300, 2021 →

**X-GRIP**




**I Scope of delivery:**

- # 1x TORQUE DISC - LIGHT oder HEAVY

**II Required material/tools:**

- # T-key (8mm)
- # Torque wrench
- # TORQUE DISC 🍌

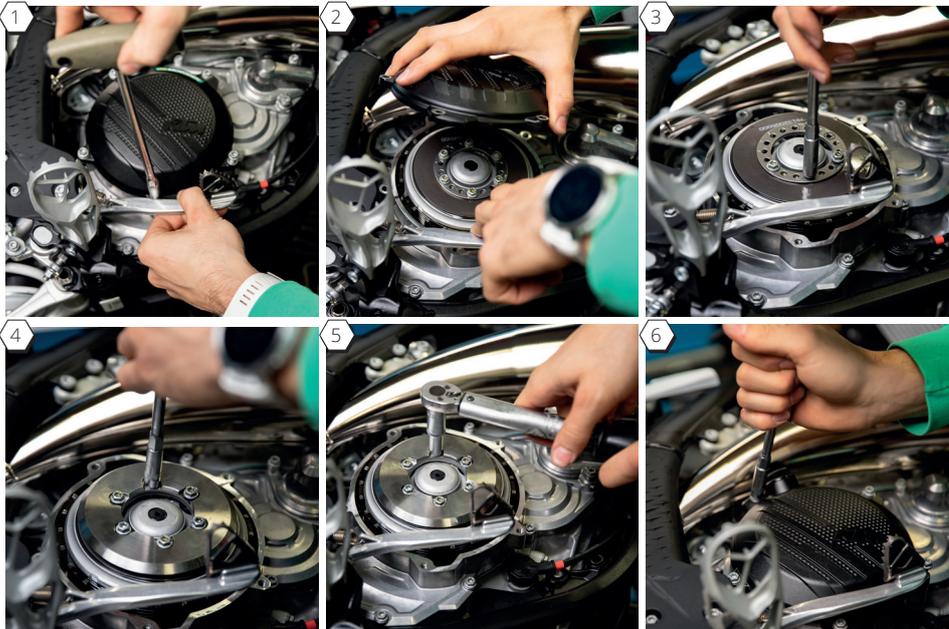

**III Installation instructions:**

The motorbike should be clean and dry. Before mounting, either drain the oil or lay the motorbike on its side.

- 1 Loosen the clutch cover screws, if necessary, pull the brake lever downwards\*
- 2 Remove the clutch cover
- 3 Loosen the screws of the disc spring\* (Remember screw placement!)
- 4 Screw the TORQUE DISC onto the disc spring (reinsert the screws in the same arrangement)
- 5 Tighten the screws with the torque wrench.
- 6 Remount the clutch cover\*

**STAY ON TRACK**

\*according to manufacturer